

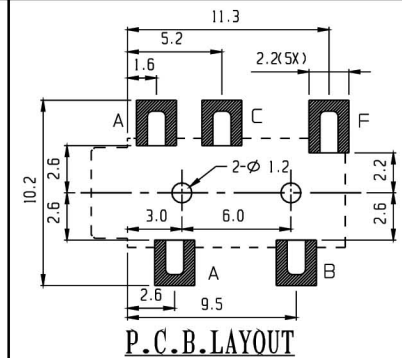
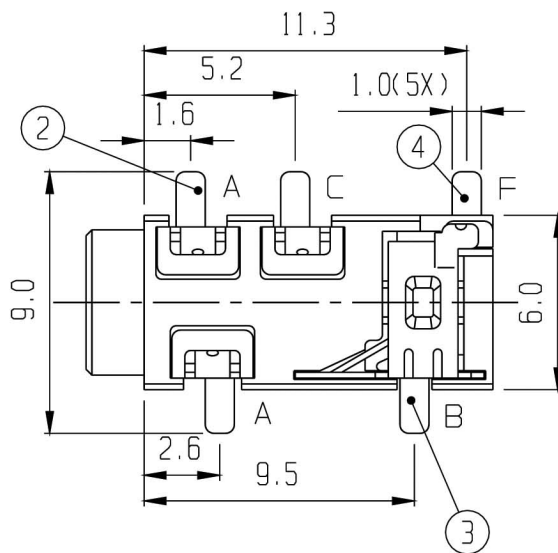


MATING PLUG

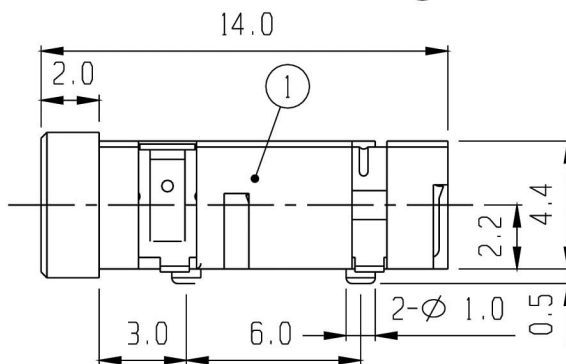

RoHS  
Compliance

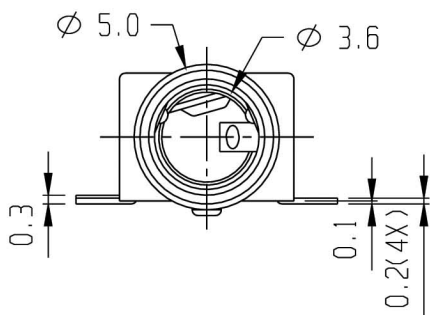

STM-35085D	STM-35084D

3	SPRING PLATE	P B S	1	Ag PLATED	4	TERMINAL	BRASS	1	Ag PLATED
1	FRAME	NYLON 6T	1		2	SPRING PLATE	P B S	3	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 3.5mm SMD STEREO JACK

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 5K cycles min.

MODEL NO: SCJ-3585-SMT-D

TOLERANCE

UNIT: MM

UP TO 1.0:±0.1

SCALE: 4:1

1.0 TO 10.0:±0.2

VERSION: 02

OVER 10.0:±0.3

DRWG NO:

DWN.

CHK'D.

APPD.

BY: Greyson

DATE: 07-NOV-2009

**VIMEX**  
INTERNATIONAL CORPORATION

