

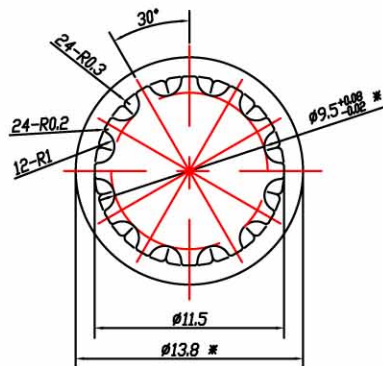


PCB MOUNTING HOLES
(VIEWED FROM COPPER SIDE)



WASHER



CIRCUIT DIAGRAM

8	WASHER	1	STEEL t=0.4	NI-PLATED(Cu ₁ 2-3um, Ni ₂ -3um)
7	SLEEVE	1	H59 (COPPER ALLOY)	RoHS COMPLIANT
6	BODY	1	PBT+10%GF 94V-0 BLACK	RoHS COMPLIANT
5	5# TERMINAL	1	H62Y t=0.4 (C2680R-H)	Ag-PLATED(Cu ₁ 2-3um, Ag ₁ 0.3um) RoHS COMPLIANT
4	4# TERMINAL	1	H62Y t=0.4 (C2680R-H)	
3	3# TERMINAL	1	QSn6.5-0.1Y t=0.35 (C5210R-H)	
2	2# TERMINAL	1	QSn6.5-0.1Y t=0.4 (C5210R-H)	
1	1# TERMINAL	1	H62Y t=0.4 (C2680R-H)	
NO.	NAME	QTY	MATERIAL (THICK, COLOR)	REMARK

ANGLES (DEG)	± 5°
L < 6	± 0.2
6 ≤ L ≤ 20	± 0.3
L > 20	± 0.4
TOLERANCES EXCEPT AS NOTED	



SCALE: 1:1
VIEW: UNIT: mm

NAME: PHONE JACK
CAT. NO: SCJ-0631HA