
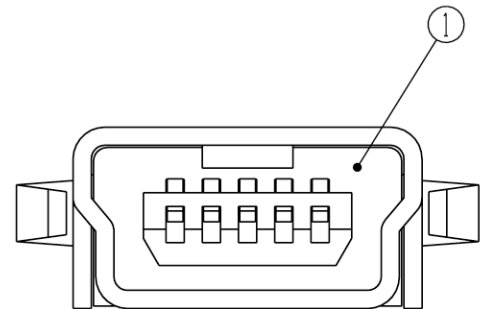


PCB LAYOUT

RoHS
Compliance

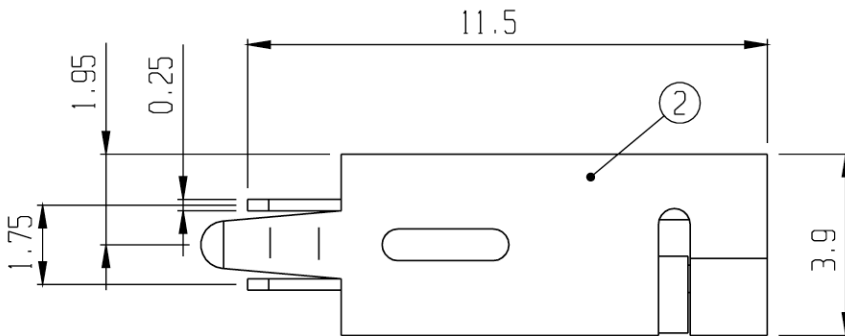

3	TERMINAL	P B S	5	Au&Sn PLATED					
1	FRAME	NYLON 46	1		2	SHELL	P B S	1	Ni PLATED
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE:	Mini USB Connector						
	RATING: DC 9V 1A	MODEL NO:	USB-M-D-FBN0-R						
	CONTACT RESISTANCE: 50mΩ Max.								
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.	<i>Jm</i>				
	WITHSTAND VOLTAGE: AC 500V for 1 minute.	UP TO 1.0:±0.1	SCALE: 6:1	CHK'D.	<i>Jm</i>				
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02	APPD.	<i>Gneyson</i>				
	SWITCHING LIFE: 5,000 cycles min.	OVER 10.0:±0.3	DRWG NO:						

BY: *Gneyson*

DATE: 28-OCT-2009

