




Non-shorting shorting


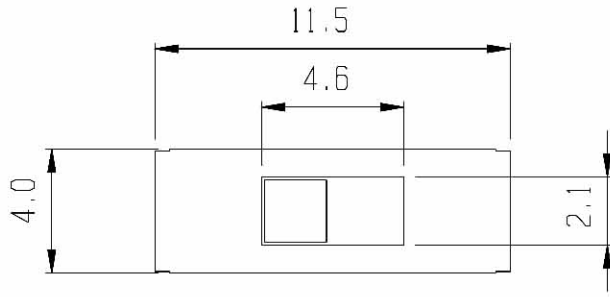


**SCHEMATIC**



**PCB LAYOUT**

**RoHS Compliance**

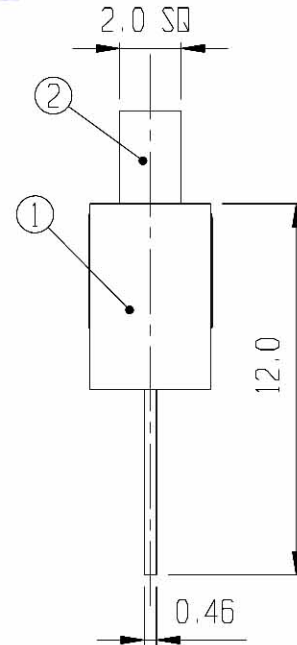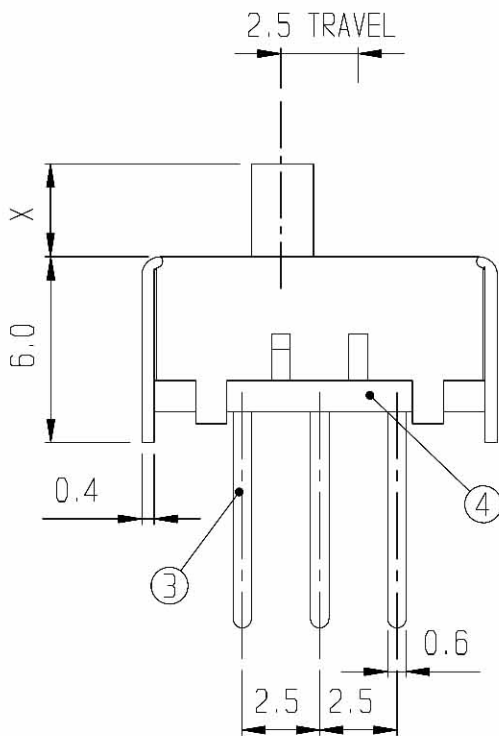

5	CONTACT	P B S	1	Ag PLATED
3	TERMINAL	BRASS	3	Ag PLATED
1	FRAME	SPCC	1	BLACK PLATED
NO	PART	MATERIAL	QTY	REMARKS

4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
2	KNOB	P O M	1	TG 2-6
NO	PART	MATERIAL	QTY	REMARKS

<b>ISSUED</b>	<b>SPECIFICATION</b>	<b>TITLE: SLIDE SWITCH (1P2T)</b>		
	RATING: DC 30V 0.3A	<b>MODEL NO: SS-12E17</b>		
	CONTACT RESISTANCE: 30mΩ max.			
	INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN. <i>hoo</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 4:1	CHK'D. <i>hoo</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01	APPD. <i>hoo</i>
	SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:	

BY: *[Signature]*  
DATE: 04-MAR-1999

