




SCHEMATIC

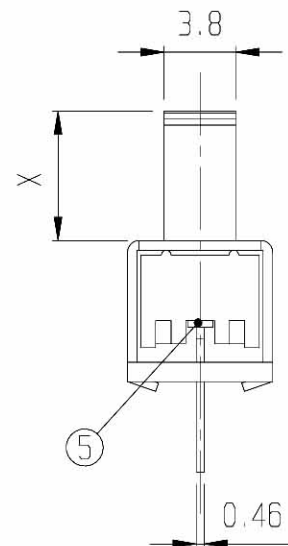

PCB LAYOUT

RoHS Compliance

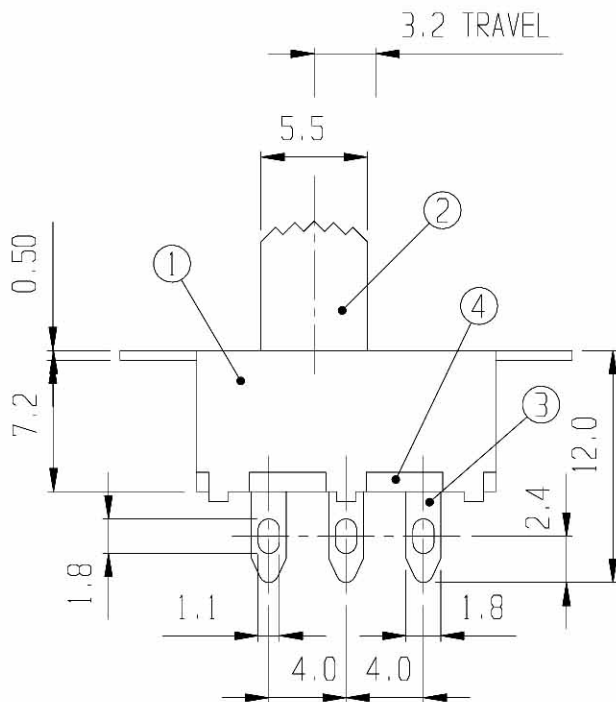

5	CONTACT	BRASS	1	Ag PLATED
3	TERMINAL	BRASS	3	Ag PLATED
1	FRAME	SPCC	1	BLACK PLATED
NO	PART	MATERIAL	QTY	REMARKS

6	SPRING	STEEL WIRE	1	
4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
2	KNOB	P O M	1	G 1.5-15
NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH (1P2T)		
	RATING: DC 30V 0.3A	MODEL NO: SS-12F14		
	CONTACT RESISTANCE: 30mΩ max.	TOLERANCE	UNIT: MM	DWN. <i>hro</i>
	INSULATION RESISTANCE: 500MΩ at 500V DC	UP TO 1.0:±0.1	SCALE: 2.5:1	CHK'D. <i>pm</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 02	APPD. <i>[Signature]</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:	
	SWITCHING LIFE: 10K cycles min.			

BY: *[Signature]*
DATE: 13-APR-2004

