



■ Single-Turn / Wirewound / Industrial / Sealed

## CE11STWW Series Round Trimming Potentiometer

### Electrical Characteristics




Standard Resistance Range	100 to 15K ohms
Resistance Tolerance	±5%
Absolute Minimum Resistance	3%
Peak Noise	100 ohms max.
Insulation Resistance	500 Vdc 1,000 megohms min.
Dielectric Strength	101.3kPa 750 Vac 8.5kPa 250 Vac
Adjustment Angle	330° nom.

### Environmental Characteristics



Power Rating (150 volts max.)	0.5 watt (85°C) 0 watt (125°C)
Temperature Range	-55°C to +125°C
Temperature Coefficient	±100ppm/°C
Rotational Life	10,000 cycles 5% Δ TR

### Physical Characteristics

Torque	20 mN·m max.
Stop Strength	40 mN·m min.

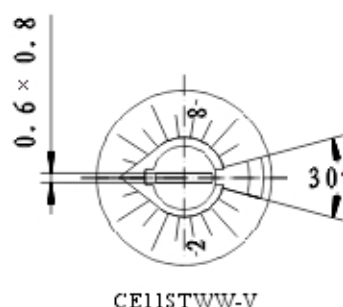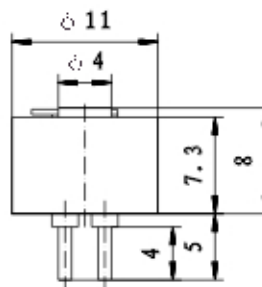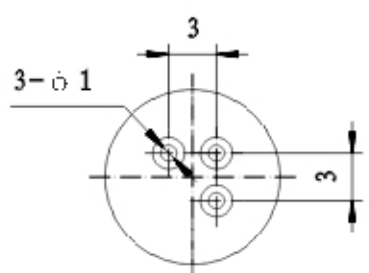

### How to order

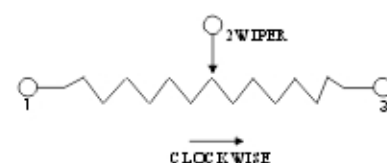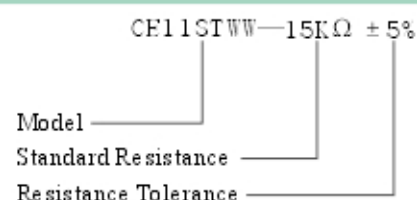

### Standard Resistance Table

Resistance(Ohms)	
100	1,500
120	1,800
150	2,200
180	2,700
220	3,300
270	4,700
330	5,600
470	8,200
560	8,200
800	10,000
820	12,000
1,000	15,000
1,200	
1,500	

Special resistance available

Detail Mil-Spec: Q/R Y20040-2002