




Non-shorting





**RoHS Compliance**



**SCHEMATIC**



**PCB LAYOUT**

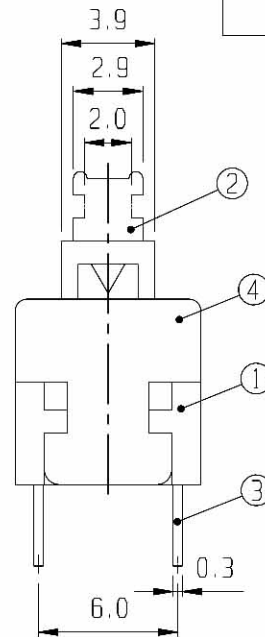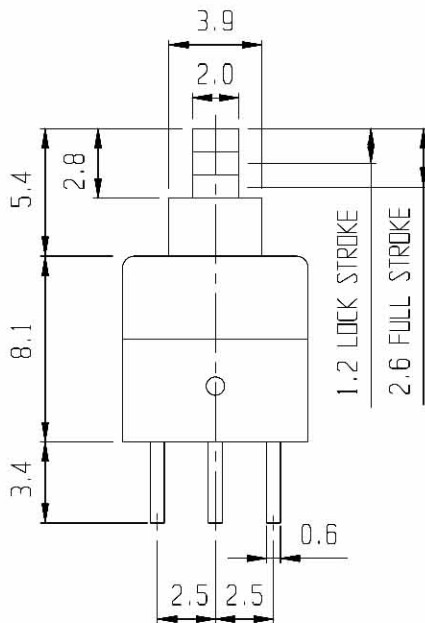

7	HOOK	S U S	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER	P O M	1 HW	
1	FRAME	NYLON	1	HB	2	KNOB	P O M	1 HBU	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

<b>ISSUED</b>	<b>SPECIFICATION</b>	<b>TITLE: PUSH SLIDE SWITCH (2P2T) (LOCK)</b>		
	RATING: DC 30V 0.1A	<b>MODEL NO: PS-22E08L</b>		
	CONTACT RESISTANCE: 70mΩ max.	TOLERANCE	UNIT: MM	DWN. <i>hso</i>
	INSULATION RESISTANCE: 100MΩ at 500V DC	UP TO 1.0:±0.1	SCALE: 3:1	CHK'D. <i>hso</i>
	WITHSTAND VOLTAGE: AC 250V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 02	APPD. <i>hso</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:	
	SWITCHING LIFE: 10K cycles min.			

BY: *[Signature]*  
DATE: 18-AUG-2005

