

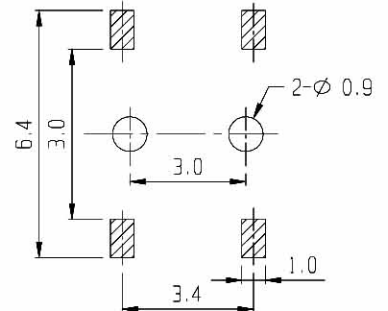


SCHEMATIC

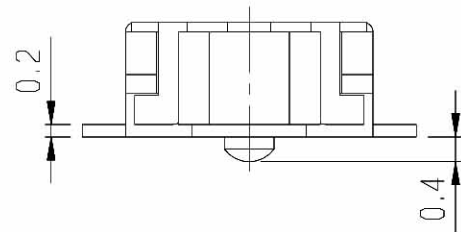

PCB LAYOUT

**RoHS
Compliance**

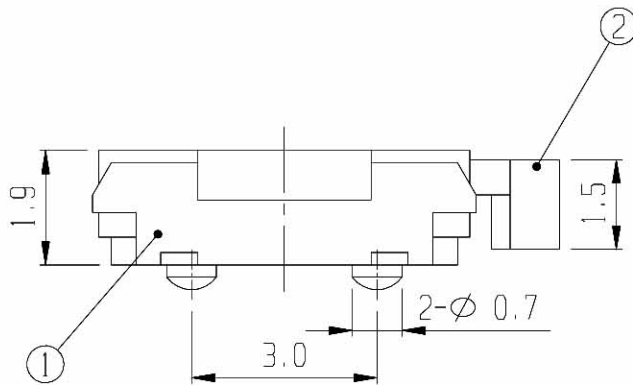

5	CONTACT	S U S	1		6	DUST COVER	POLYIMIDE	1	
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: TACT SWITCH		
	RATING: DC 12V 50mA	MODEL NO: TC-26401		
	CONTACT RESISTANCE: 100mΩ Max.			
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN. <i>hro</i>
	WITHSTAND VOLTAGE: AC 250V for 1 minute.	UP TO 1.0:±0.1	SCALE: 8:1	CHK'D. <i>fm</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02	APPD. <i>hro</i>
	SWITCHING LIFE: 50k Cycles Min.	OVER 10.0:±0.3	DRWG NO:	

BY: *[Signature]*
DATE: 18-AUG-2004

